



MS0402 Presentation Switcher Series

(N008/N009/N010/N011)

All-in-One Presentation Switch for Next-Gen Conference Room Integration


Streamline video, audio, USB, and control with flexible I/O and advanced connectivity options

The MS0402 Series is a versatile 4x2 conference presentation switch designed to streamline connectivity and control in modern meeting environments. Engineered with integrators in mind, it combines dual USB-C and dual HDMI inputs—each equipped with cable lock support—while delivering seamless video, audio, USB, Ethernet, and control integration in a single device. The USB-C ports support full-featured 4K video, USB 3.2 data transfer, and up to 60W charging, making this unit ideal for bring-your-own-device (BYOD) scenarios in corporate or education settings.

The MS0402 stands out with advanced switching and control features like auto input detection, video/USB independent switching, and priority rules. It includes four USB 3.2 ports for peripherals, balanced audio de-embedding, and USB-to-Ethernet bridges on each input for direct 1G connectivity—minimizing the need for dongles. Select models add HDBaseT 3.0 (N009/N011) and Dante with USB audio routing (N010/N011) for seamless UCC integration.


Designed for flexibility and integration, the MS0402 Series offers robust control options including Ethernet, RS232, GPIO, RELAY, and occupancy sensor support. It includes two RJ45 ports that support switching or network segmentation and complies with enterprise standards like HTTP/HTTPS control and 802.1x authentication. A full API is available, allowing integrators to define custom control methods and connect GPIO sensors for auxiliary functions. For configuration and troubleshooting, a built-in WebUI provides an intuitive browser-based interface. Whether you're building all-in-one collaboration hubs or modular AV-over-IP systems, the MS0402 is a future-ready platform that adapts to evolving conference room needs.

MS402 Presentation Switcher

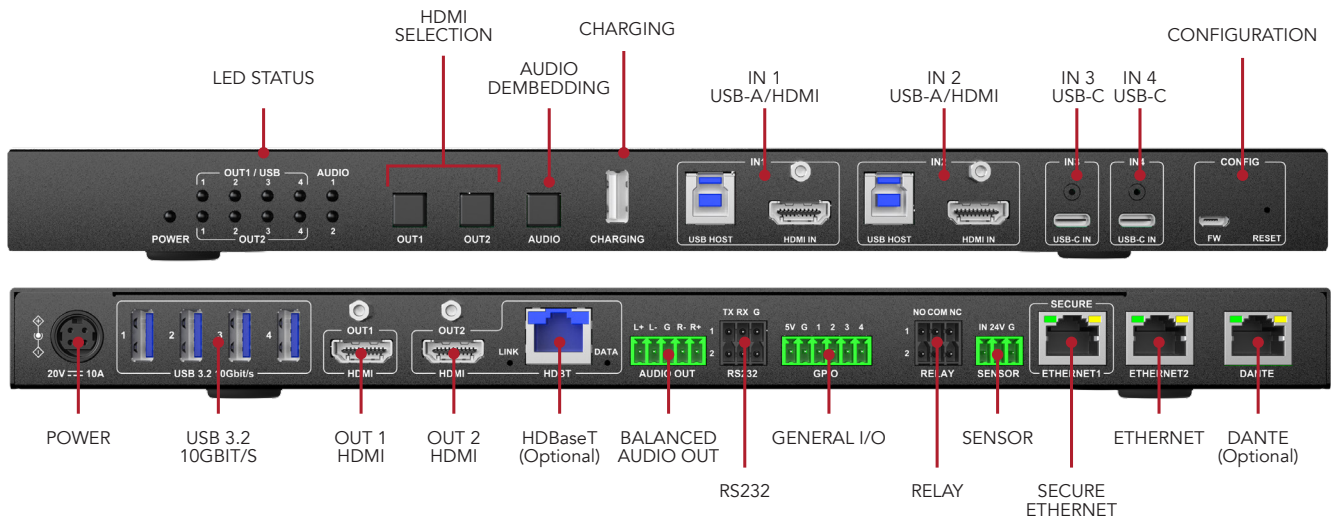

- 4K** 4K Video Support
- BALANCED AUDIO** Balanced Audio De-Embedding
- LED** Intuitive Status LEDs providing clear visual status indicators for easy monitoring
- USB-C** Full-Featured USB-C – Supports 4K video, USB 3.2, and 60W charging
- RS232** RS232, GPIO, RELAY, and OCS sensor support
- Dante** (N010 & N011) – Seamless integration
- USB-C** USB-C inputs
- USB** 4x USB 3.2 Device ports connect cameras, speakerphones, or other UCC gear
- HDBT 3.0** (N009 & N011) – Extend video and USB up to 100M
- X4 2.0** 4x2 Switching – Dual HDMI + Dual USB-C inputs with 2 mirrored outputs
- LAN** Built-in 1Gb Ethernet LAN port

Dual Screen Conference Room with Room PC Application (HDBaseT & Dante)

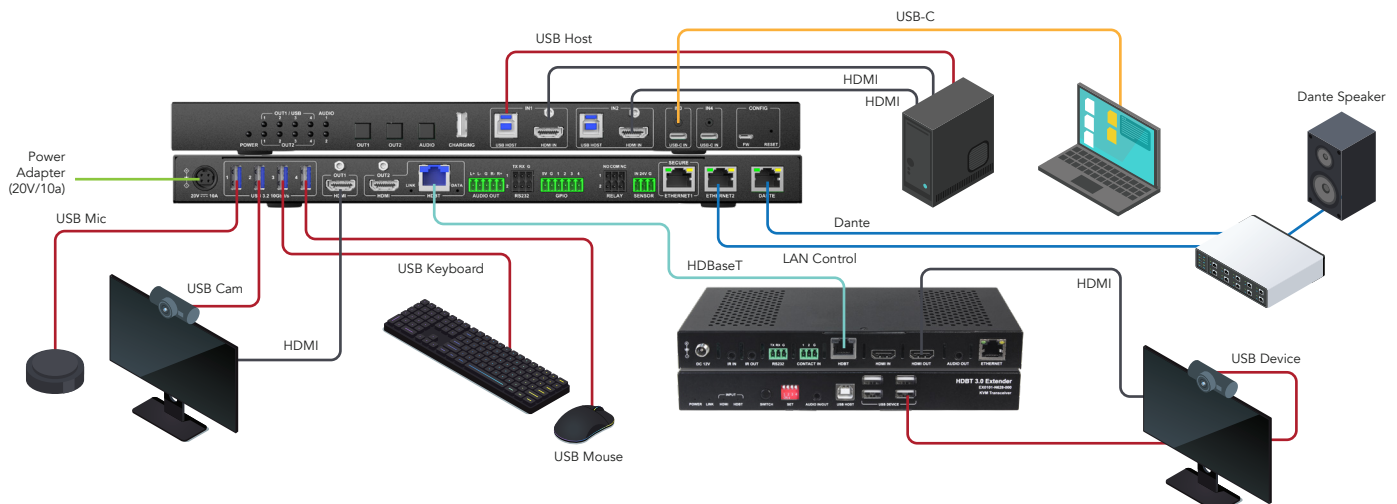

OTHER AVAILABLE VERSIONS

